


AN173 – AN176 bolts. Close tolerance machine bolts. Available with or without single hole through shank and/or through head. Part numbers as shown are for non corrosion-resistant, drilled shanks (e.g., AN173-5); for undrilled shanks, add “A” after the dash number (e.g., AN173-5A); for drilled heads, change the dash to an “H” (e.g., AN173H5 or AN173H5A); for corrosion-resistant bolts, replace the dash with a “C” (e.g., AN173C5, AN173HC5 or AN173HC5A).

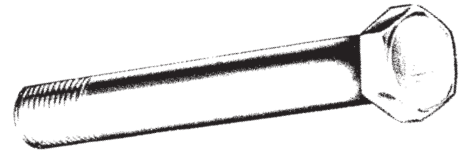

Part No.	Dia.	TPI	Length	Grip	Part No.	Dia.	TPI	Length	Grip			
AN173-5	3/16"	32 NF-3A	2 1/32"	1/4"	AN174-24	1/4"	28 UNF-3A	2 1/32"	2 1/16"			
AN173-6			2 7/32"	3/8"	AN174-25			2 1/32"	2 3/16"			
AN173-7			2 9/32"	1/2"	AN174-26			2 25/32"	2 15/16"			
AN173-10			1 1/2"	5/8"	AN175-14			1 19/64"	1 1/8"			
AN173-11			1 5/32"	3/4"	AN175-15			1 23/32"	1 3/16"			
AN173-12			1 9/32"	7/8"	AN175-16			1 27/32"	1 5/16"			
AN173-13			1 13/32"	1"	AN175-17			1 31/32"	1 7/16"			
AN173-14			1 17/32"	1 1/8"	AN175-20			2 3/32"	1 1/8"			
AN174-5			1/4"	28 UNF-3A	2 1/2"			3/16"	AN175-21	24 UNF-3A	2 1/2"	1 11/16"
AN174-6					2 5/32"			5/16"	AN175-22		2 11/32"	1 13/16"
AN174-7					2 9/32"			7/16"	AN175-23		2 15/32"	1 15/16"
AN174-10					1 1/2"			5/16"	AN175-24		2 19/32"	2 1/8"
AN174-11					1 5/32"			11/16"	AN175-25		2 23/32"	2 3/16"
AN174-12					1 3/4"			1 3/16"	AN175-26		2 27/32"	2 3/8"
AN174-13	1 13/32"	1 5/16"			AN175-22	2 31/32"	2 5/16"					
AN174-14	1 17/32"	1 1/2"			AN175-23	3 1/32"	2 1/2"					
AN174-15	1 21/32"	1 3/4"			AN175-24	3 1/2"	2 11/16"					
AN174-16	1 25/32"	1 5/8"			AN175-25	3 11/32"	2 13/16"					
AN174-17	1 29/32"	1 3/4"			AN175-26	3 15/32"	2 15/16"					
AN174-20	2 1/2"	1 3/8"			AN176-12	1 21/64"	1 1/8"					
AN174-21	2 5/32"	1 11/16"			AN176-13	1 29/64"	1 3/8"					
AN174-22	2 9/32"	1 13/16"			AN176-14	1 37/64"	1 5/8"					
AN174-23	2 13/32"	1 15/16"	AN176-15	1 45/64"	1 7/8"							

NAS6203 – NAS6220 bolts. Supersedes NAS464 Series bolts. Shear bolts with modified hex head; close tolerance, short thread. Made of cadmium-plated alloy steel; undrilled shank and head.

New Part No.	Old Part No.	Diameter	Threads per Inch	Grip	Length
NAS6203	NAS1103-3	1900	32	.188"	.526"
NAS6204	NAS1103-4	1900	32	.250"	.588"
NAS6205	NAS1103-5	1900	32	.312"	.650"
NAS6220	NAS1103-20	1900	32	1.250"	1.588"



NAS6603 – NAS6620 bolts. Shear bolts with modified hex head; close tolerance, long thread. Made of alloy steel.

New Part No.	Old Part No.
NAS6603 Series	NAS1303 Series
through	through
NAS6620 Series	NAS1320 Series

Note: NAS 1303–1320 are inactive, referred to as NAS 6603–6620 by NAS drawings.

