

AN737TW clamps.

Part No.	Description	Effective Diameter	
		Minimum	Maximum
AN737TW-22	AN737TW clamp	7/16"	11/16"
AN737TW-24	AN737TW clamp	1/2"	3/4"
AN737TW-26	AN737TW clamp	9/16"	13/16"
AN737TW-30	AN737TW clamp	13/16"	15/16"
AN737TW-34	AN737TW clamp	13/16"	1 1/16"
AN737TW-38	AN737TW clamp	15/16"	1 3/16"
AN737TW-44	AN737TW clamp	6/4"	1 3/8"
AN737TW-46	AN737TW clamp	1"	1 1/16"
AN737TW-48	AN737TW clamp	1 3/64"	1 1/2"
AN737TW-44-48	AN737TW clamp	1 21/64"	1 1/2"
AN737TW-56	AN737TW clamp	1 3/8"	3 3/4"
AN737TW-58	AN737TW clamp	1 21/64"	3 3/4"
AN737TW-66	AN737TW clamp	1 5/16"	1 13/16"
AN737TW-56-66	AN737TW clamp	1 21/64"	2 1/16"
AN737TW-74	AN737TW clamp	1 7/8"	2 1/16"
AN737TW-82	AN737TW clamp	2 1/8"	2 3/16"
AN737TW-91	AN737TW clamp	2 13/32"	2 27/32"
AN737TW-74-91	AN737TW clamp	1 7/8"	2 27/32"
AN737TW-98	AN737TW clamp	2 5/8"	3 1/16"
AN737TW-107	AN737TW clamp	2 29/32"	3 17/32"
AN737TW-114	AN737TW clamp	3 3/8"	3 3/16"
AN737TW-98-114	AN737TW clamp	2 5/8"	3 3/16"

Note: AN737B is scheduled to be replaced by NAS1924 when supply is depleted.




MS21919 Series clamps. Loop-type cushioned aluminum alloy clamp.

Cushion (non fuel-resistant) is bonded to inner surface and edges of clamp. WDG clamps are cushion wedge type. Cushion assures tight fit and eliminates vibration, thus preventing line abrasion.

Tube Dia.	Aluminum	CRES Steel (405° F)	CRES Steel (400° F)
	1/16"	MS21919DG1	MS21919CJ1
1/8"	MS21919WDG2	MS21919WCJ2	MS21919WCH2
3/16"	MS21919WDG3	MS21919WCJ3	MS21919WCH3
1/4"	MS21919WDG4	MS21919WCJ4	MS21919WCH4
5/16"	MS21919WDG5	MS21919WCJ5	MS21919WCH5
3/8"	MS21919WDG6	MS21919WCJ6	MS21919WCH6
7/16"	MS21919WDG7	MS21919WCJ7	MS21919WCH7
1/2"	MS21919WDG8	MS21919WCJ8	MS21919WCH8
9/16"	MS21919WDG9	MS21919WCJ9	MS21919WCH9
5/8"	MS21919WDG10	MS21919WCJ10	MS21919WCH10
11/16"	MS21919WDG11	MS21919WCJ11	MS21919WCH11
3/4"	MS21919WDG12	MS21919WCJ12	MS21919WCH12
13/16"	MS21919WDG13	MS21919WCJ13	MS21919WCH13
7/8"	MS21919WDG14	MS21919WCJ14	MS21919WCH14
15/16"	MS21919WDG15	MS21919WCJ15	MS21919WCH15
1"	MS21919WDG16	MS21919WCJ16	MS21919WCH16
1 1/16"	MS21919WDG17	MS21919WCJ17	MS21919WCH17
1 1/8"	MS21919WDG18	MS21919WCJ18	MS21919WCH18
1 1/4"	MS21919WDG19	MS21919WCJ19	MS21919WCH19
1 1/2"	MS21919WDG20	MS21919WCJ20	MS21919WCH20
1 3/4"	MS21919WDG21	MS21919WCJ21	MS21919WCH21
1 7/8"	MS21919WDG22	MS21919WCJ22	MS21919WCH22
1 15/16"	MS21919WDG23	MS21919WCJ23	MS21919WCH23
1 1/2"	MS21919WDG24	MS21919WCJ24	MS21919WCH24
1 3/16"	MS21919WDG25	MS21919WCJ25	MS21919WCH25
1 5/8"	MS21919WDG26	MS21919WCJ26	MS21919WCH26
	MS21919WDG27	MS21919WCJ27	MS21919WCH27
1 3/4"	MS21919WDG28	MS21919WCJ28	MS21919WCH28
	MS21919WDG29	MS21919WCJ29	MS21919WCH29

Notes: Letter "W" indicates wedge type cushion. Wedge (W) is mandatory for -2 thru -48 size clamps. Wedge is prohibited on -1 and -50 thru -66 size clamps.

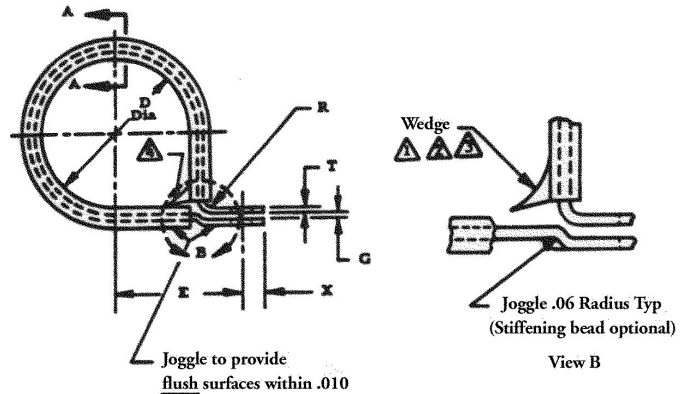

Tube Dia.	Aluminum	CRES Steel (405° F)	CRES Steel (400° F)
	1 1/8"	MS21919WDG30	MS21919WCJ30
	MS21919WDG31	MS21919WCJ31	MS21919WCH31
2"	MS21919WDG32	MS21919WCJ32	MS21919WCH32
2 1/16"	MS21919WDG33	MS21919WCJ33	MS21919WCH33
2 1/8"	MS21919WDG34	MS21919WCJ34	MS21919WCH34
2 3/16"	MS21919WDG35	MS21919WCJ35	MS21919WCH35
2 1/4"	MS21919WDG36	MS21919WCJ36	MS21919WCH36
2 3/8"	MS21919WDG37	MS21919WCJ37	MS21919WCH37
2 5/8"	MS21919WDG38	MS21919WCJ38	MS21919WCH38
2 7/8"	MS21919WDG40	MS21919WCJ40	MS21919WCH40
2 1/2"	MS21919WDG42	MS21919WCJ42	MS21919WCH42
2 3/4"	MS21919WDG44	MS21919WCJ44	MS21919WCH44
	MS21919WDG46	MS21919WCJ46	MS21919WCH46
3"	MS21919WDG48	MS21919WCJ48	MS21919WCH48
	MS21919DG50	MS21919CJ50	MS21919CH50
3 3/4"	MS21919DG52	MS21919CJ52	MS21919CH52
	MS21919DG54	MS21919CJ54	MS21919CH54
3 3/8"	MS21919DG56	MS21919CJ56	MS21919CH56
	MS21919DG58	MS21919CJ58	MS21919CH58
4"	MS21919DG64	MS21919CJ64	MS21919CH64
	MS21919DG66	MS21919CJ66	MS21919CH66

Notes: MS21919 is scheduled to be replaced by AS21919 when supply is depleted. DG – Aluminum band with Chloroprene cushion (212° F); CH – CRES band with silicone cushion (400° F) CJ – CRES band with Fluorosilicone cushion (450° F)